


DOUBLE STACK MODULES

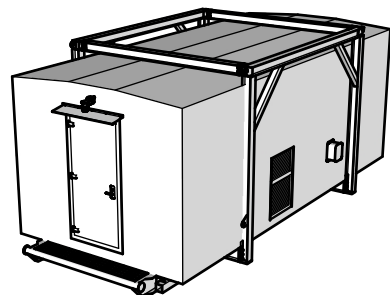

SINGLE MODULE

DOOR SCHEDULE		
MARK	QTY	DESCRIPTION
(A)	2	3-0 x 6-8 Exterior Aluminum
(B)	2	2-8 x 6-8 Wood Hollow Core
(C)	1	2-6 x 6-8 Wood Hollow Core
(D)	1	2-0 x 6-8 Wood Hollow Core

ELECTRICAL/HVAC SCHEDULE		
MARK	QTY	DESCRIPTION
(A)	1	Electrical Panel 120/240V 1-ph (Non-Classified)
(A)	1	HVAC Unit (Non-Classified)

FIRE & GAS SCHEDULE		
MARK	QTY	DESCRIPTION
(1)	1	Fire & Gas Panel
(2)	2	Fire Extinguisher
(3)	2	Gas Detector
(4)	2	Smoke Detector
(5)	2	Thermal Detector

FURNISHINGS SCHEDULE		
MARK	QTY	DESCRIPTION
(1)	8	Bunk Shelf
(2)	4	Double Stack Lockers
(3)	4	Bunk Beds
(4)	1	Water Heater
(5)	1	Vanity Cabinet with Sink & Mirror
(6)	1	Shower 36"
(7)	1	Toilet with Upper Shelf

REVISION HISTORY		
REV	DATE	DESCRIPTION



Designed By: KED  
Drawn By: KED  
GLS Quote:

Gulf Land Structures, LLC  
PO Box 52605  
Lafayette, LA 70505-2605  
4100 Cameron Street  
Lafayette, LA 70506  
Date: 06/21/07  
Date: 03/23/16  
Date:



GLS RENTALS  
DEPARTMENT

11' x 24' Fiberglass Building  
Stubby 8-Person Sleeper  
General Arrangement

Page  
G-1.0  
REV A

NOTE:  
Building Weight 17,000 lbs.